



## URIT-5160 Hematology Analyzer

Laser light multi-dimensional cell classification

Resistant RBC mode

WIC and WOC for WBC counting

Up to 60 samples per hour throughput

With touch screen



## | Specifications |

WBC, LYM%, MON%, NEU%, EOS%, BAS%, LYM#, MON#, NEU#, EOS#, BAS#, RBC, HGB, HCT, MCV, MCH, MCHC, RDW\_CV, RDW\_SD, PLT, MPV, PDW, PCT, P\_LCR, P\_LCC, RETIC%, RETIC\_ABS, IRF

Research Parameters: ALY#, ALY%, LIC#, LIC%, NRBC#, NRBC%

**34 parameters**

2 Histograms for RBC and PLT


2 Scatter grams: 5-part differential scatter gram  
Eosinophils and Moutrophils scatter gram

2 3-D stereograms


<b>Principles of operation</b>	WBC/DIFF: Flow Cytometry, Semi-conductor laser light multi-dimensional cell classification WBC Analysis: Optical and impedance measurements RBC/PLT Analysis: Impedance method HGB test: Cyanide-free reagent colorimetry
<b>Reagent</b>	Diluent, Sheath, Detergent, Lyse
<b>Sampling modes</b>	Whole blood : 20µL Pre-diluent : 20µL
<b>Aperture Diameter</b>	WBC 100µm   RBC/PLT 68µm
<b>Throughput</b>	Whole blood : up to 60 samples per hour Pre-diluent : up to 60 samples per hour
<b>Data storage</b>	Up to 200,000 sample results with grams
<b>Alarms</b>	Error messages
<b>Display</b>	10.4 inch with touch screen
<b>Size</b>	L490mm x H332mm x W459mm
<b>Power</b>	250VA
<b>Weight</b>	35KG




Main page

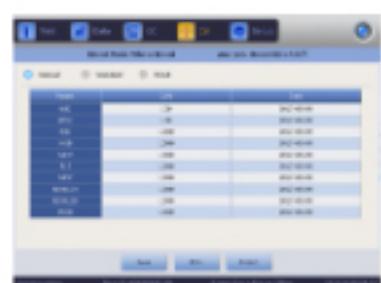

Calibration setting

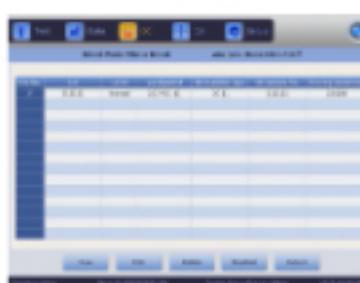

QC setting

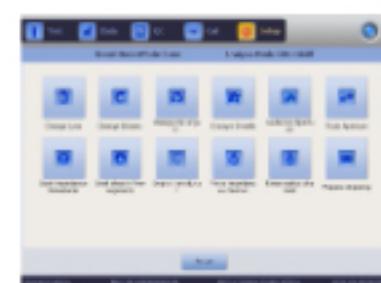

System maintenance